



L10 177 616 "C" – Klapka zpětná mezipřírubová

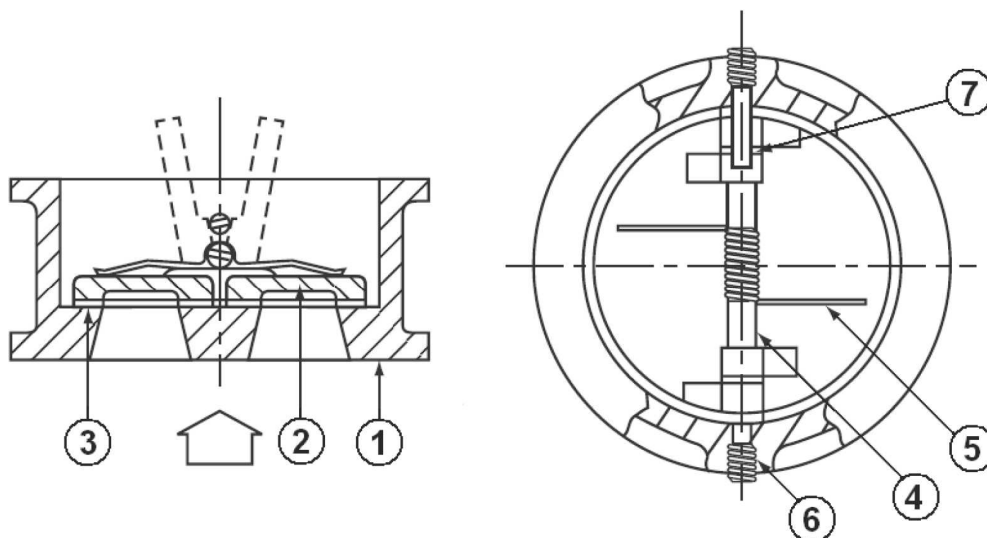

Item	Designation	Materials 370	Materials 371	Materials 372
1	Body	Cast iron EN-GJL 250	Cast iron EN-GJL 250	SS ASTM A351 CF8M
2	Disc	Nickel cast iron EN-GJS 400-15	SS ASTM A351 CF8M	SS ASTM A351 CF8M
3	Seat	NBR	EPDM	FKM
4	Shaft	SS 304	SS 304	SS 316
5	Spring	SS 316	SS 316	SS 316
6	Nut	SS 304	SS 304	SS 316
7	Disc bearing	PTFE	PTFE	PTFE

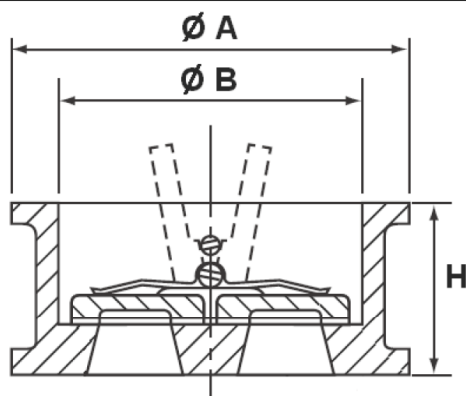

	DN	50	65	80	100	125	150	200	250	300	350	400	450	500	600
Ref. 370/371	H	54	54	57	64	70	76	95	108	144	184	191	203	213	222
	Ø B	70	83	90	115	142	169	219	273	324	356	406	467	514	616
	Ø A	109	129	144	164	194	220	275	330	380	440	491	541	596	698
	Weight (Kg)	1.62	2.3	3.14	4.5	6.7	9.05	16	26.9	38.9	80	106	128	158	225

OPENING PRESSURE (in mbar) :

DN	50	65	80	100	125	150	200	250	300
Horizontal position	230	94	190	280	160	79	41	38	31
Vertical position ascend. fluid	260	114	230	320	180	95	57	58	56

Teplotní omezení : do +120°C